
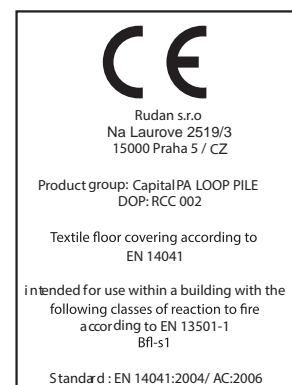


## AUSTIN - TECHNICAL SPECIFICATION

Product definition		: tufted loop pile
Guage		: 1/10"
No. Of tufts	ISO 1763	: $\pm 164.000 \text{ m}^2$
Pile fibre		: 100% polyamide SDN
Pile weight	ISO 8543	: $550 \text{ g/m}^2 \pm 5\%$
Pile height	ISO 1766	: $2,6 \text{ mm} \pm 5\%$
Title backing		: Modified Bitumen - Polyflex
Total thickness		: $5,0 \text{ mm} \pm 5.0\%$
Total weight		: $4.260 \text{ g/m}^2 \pm 7.5\%$
Tile size		: $50 \times 50 \text{ cm}$
Use classification	EN 1307	: Class 33
Castor chair test	EN 985	: A, continous use
Thermal isolation	ISO 8302	: $0,08 \text{ m}^2 \text{ K/W}$
Dimensional stability	ISO 2551	: pass
Sound absorption	ISO 140-8	: 24 dB
Luxury Comfort	EN 1307	: Class 1
Walk on test	ISO 6356	: $\leq 2,0 \text{ kV}$
Horizontal electrical resistance	ISO CD 10965	: $3 \times 10^8 \Omega$
Vertical electrical resistance	ISO CD 10965	: $4 \times 10^{10} \Omega$
Reaction to fire	EN ISO 11925-2	: Bfl -s1
	EN ISO 9239-1	

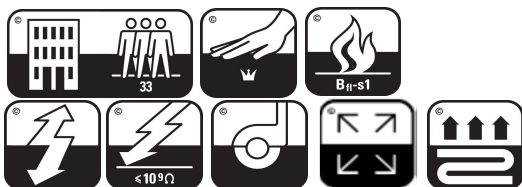

Recommended maintenance: Best results are obtained when cleaned with a dry shampoo method.

Pile direction: Directional arrows are printed on the back of each tile.  
Best results are obtained when laid checkerboard.

Laying instructions: Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than  $30 \text{ m}^2$  it is advisable to use double sided adhesive tape on every 8th row or a tackifier.