
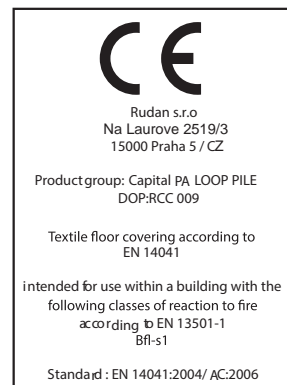


BOSTON - TECHNICAL SPECIFICATION

Product definition		: tufted loop pile
Guage		: 1/10"
No. Of tufts	ISO 1763	: ± 36/10cm
Pile fibre		: 100% polyamide SDN
Pile weight	ISO 8543	: 710 g/m ² ± 5%
Pile height	ISO 1766	: 2-4 mm ± 5%
Title backing		: Modified Bitumen - Polyflex
Total thickness		: 6,5 mm ± 5.0%
Total weight		: 4.800 g/m ² ± 7.5%
Tile size		: 50 x 50 cm
Use classification	EN 1307	: Class 33
Castor chair test	EN 985	: A, continous use
Thermal isolation	ISO 8302	: 0,08 m ² K/W
Dimensional stability	ISO 2551	: pass
Sound absorption	ISO 140-8	: 24 dB
Luxury Comfort	EN 1307	: Class 1
Walk on test	ISO 6356	: ≤ 2,0 kV
Horizontal electrical resistance	ISO CD 10965	: 3x10 ⁸ Ω
Vertical electrical resistance	ISO CD 10965	: 4x10 ¹⁰ Ω
Reaction to fire	EN ISO 11925-2	: Bfl -s1
	EN ISO 9239-1	

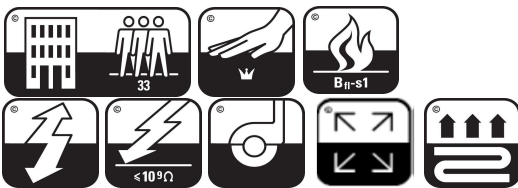

Recommended maintenance: Best results are obtained when cleaned with a dry shampoo method.

Pile direction: Directional arrows are printed on the back of each tile.
 Best results are obtained when laid checkerboard.

Laying instructions: Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.