

FRANKFURT



CAPITAL
COLLECTION


house | office | public space

SPECIFICATION

| | | |
|-----------------|----------|---------------------|
| Construction | | Scroll loop pile |
| Gauge | | Tufted 1/10 |
| Dye method | | SDN (Solution dyed) |
| Number of tufts | ISO 1763 | ± 177.750/ m2 |
| Pile fibre | | 100% Nylon (PA 6) |
| Pile weight | ISO 8543 | 550 gr/ m2 ± 5% |
| Pile height | ISO 1766 | 2,5 mm ± 5% |
| Tile backing | | Polyflex |
| Total thickness | ISO 1765 | 5,5 mm ± 5% |
| Total weight | ISO 8543 | 3.900gr/m2 ± 7,5% |
| Tile size | | 50 x 50 cm |

PERFORMANCE

| | | |
|-------------------------|-------------------------------|-------------------------|
| Use classification | method en 1307 | 33 |
| Castor chair test | EN 985 | A, continuous use |
| Abrasion | ISO 12951 | pass |
| Thermal resistance | ISO 8302 | 0,04 m ² K/W |
| Dimensional stability | EN 986 | pass |
| Luxury/ Comfort | EN 1307 | classe 1 |
| Static loading | | anti-static |
| Impact sound insulation | ISO 140-8 | ΔLw 24dB |
| Reaction to fire | EN ISO 11925-2/ EN ISO 9239-1 | Bfl -S1 |

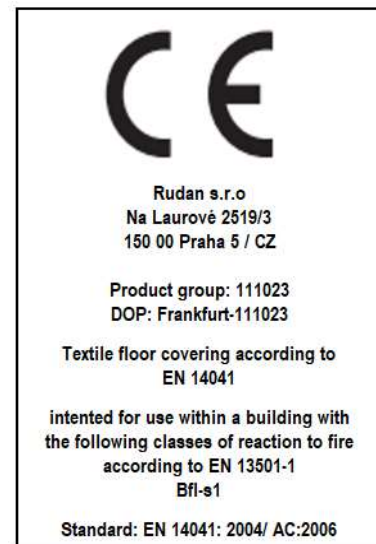

Maintenance recommendations: Best results are achieved with dry cleaning

Recommended installation: Carpet tiles can be laid on a flat, dry, smooth surface (ČSN74 4505)

We recommend fixing the carpet squares over the entire surface with flexible glue. In case of laying without use adhesives, we recommend using double-sided adhesive tape. Directional arrows are printed on the back of each tile. Best results are achieved when installed in a checkerboard.